



# BHTS ZZ 280° ( 61800)

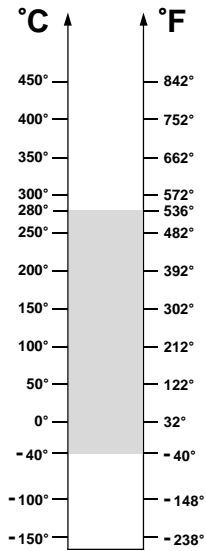

: 40° / 280°C

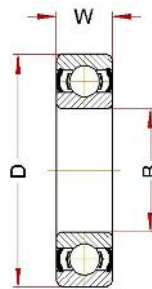

: 200° / 280°C



	(B)	(D)	(W)	'	/	, kN 280°C	, kN 20°C
<b>61800 BHTS ZZ 280°</b>	10	19	5	5,5	2240	0,38	0,53
<b>61801 BHTS ZZ 280°</b>	12	21	5	6,3	2080	0,68	0,95
<b>61802 BHTS ZZ 280°</b>	15	24	5	7,4	1920	0,89	1,25
<b>61803 BHTS ZZ 280°</b>	17	26	5	8,2	1760	1,04	1,45
<b>61804 BHTS ZZ 280°</b>	20	32	7	18	1600	1,60	2,24
<b>61805 BHTS ZZ 280°</b>	25	37	7	24	1360	2,00	2,80
<b>61806 BHTS ZZ 280°</b>	30	42	7	27	1040	2,39	3,35
<b>61807 BHTS ZZ 280°</b>	35	47	7	32	880	2,57	3,60
<b>61808 BHTS ZZ 280°</b>	40	52	7	35	800	3,04	4,25
<b>61809 BHTS ZZ 280°</b>	45	58	7	42	720	4,00	5,60
<b>61810 BHTS ZZ 280°</b>	50	65	7	52	680	4,50	6,30
<b>61811 BHTS ZZ 280°</b>	55	72	9	81	600	6,07	8,50
<b>61812 BHTS ZZ 280°</b>	60	78	10	105	560	7,86	11,0
<b>61813 BHTS ZZ 280°</b>	65	85	10	124	504	8,57	12,0
<b>61814 BHTS ZZ 280°</b>	70	90	10	133	480	8,93	12,5
<b>61815 BHTS ZZ 280°</b>	75	95	10	143	448	9,57	13,4