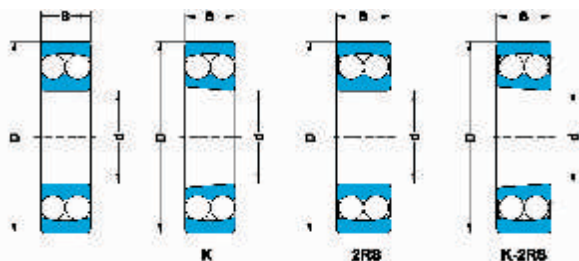


Self Aligning ball bearings
d 5-20mm

Principal Dimensions			load ratings		Speed Rating		Mass	Designation
d	D	B	dynamic C	Static C ₀	Grease	Oil	kg	-
mm			kN			RPM		
5	19	6	2.4	0.5	30000	35000	0.01	135
6	19	6	2.4	0.5	30000	35000	0.01	126
7	22	7	2.6	0.6	30000	35000	0.02	127
8	22	7	2.6	0.6	30000	35000	0.02	108
9	26	8	3.8	0.8	26000	32000	0.02	129
10	30	9	5.3	1.1	24000	30000	0.03	1200
	30	14	8.3	1.75	22000	28000	0.05	2200
	35	11	7.1	1.6	20000	25000	0.06	1300
12	32	10	5.5	1.3	23000	29000	0.04	1201
	32	14	9	1.95	20000	26000	0.05	2201
	32	14	5.6	1.27	16000	--	0.05	2201.2RS
	37	12	9.5	2.2	18000	22000	0.07	1301
15	35	11	7.5	1.7	20000	25000	0.05	1202
	35	14	9.1	2.1	19000	24000	0.06	2202
	35	14	7.5	1.76	15000	--	0.06	2202.2RS
	42	13	9.5	2.3	17000	20000	0.10	1302
	42	17	11.9	2.8	16000	19000	0.13	2302
17	40	12	8	2	18000	22000	0.08	1203
	40	16	11.2	2.7	16000	19000	0.09	2203
	40	16	1.0	2.65	11000	--	0.14	2203.RS
	47	14	12.5	3.2	15000	17000	0.14	1303
	47	19	14.2	3.6	14000	17000	0.18	2303
	47	19	12.5	3.2	11000	--	0.18	2303.2RS
20	47	14	10	2.65	15000	18000	0.13	1204
	47	14	10	2.65	15000	18000	0.12	1204K
	47	18	14	3.5	14000	17000	0.14	2204
	47	18	10	2.65	11000	--	0.14	2204.2RS
	52	15	12.5	3.35	13000	16000	0.17	1304
	52	15	12.5	3.35	13000	16000	0.17	1304K
	52	21	18	4.65	13000	16000	0.24	2304
	52	21	12.5	3.35	10000	--	0.24	2304.2RS