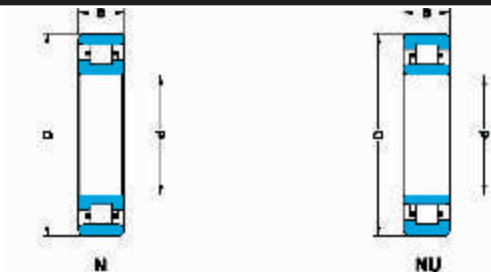


Cylindrical Roller bearings With Cage  
Non-Locating  
d15-40mm

Principal Dimensions			Basic load ratings		Fatigue Load Limit	Limiting Speed	Mass	Designation
d	D	B	dynamic C	Static C <sub>0</sub>	P <sub>u</sub>	RPM	kg	
mm			kN		kN			
<b>15</b>	35	11	15.1	10.4	1.47	22000	0.047	<b>N202-E</b>
	35	11	15.1	10.4	1.29	22000	0.048	<b>NU202-E</b>
<b>17</b>	40	12	20.8	14.6	2.11	18000	0.068	<b>N203-E</b>
	40	12	20.8	14.6	1.82	18000	0.069	<b>NU203-E</b>
	40	16	28.5	21.9	3.50	18000	0.051	<b>NU-2203-E</b>
	47	14	30	21.2	2.65	16000	0.121	<b>NU-303-E</b>
<b>20</b>	47	14	32.5	24.7	3.85	16000	0.112	<b>N204-E</b>
	47	14	32.5	24.7	3.1	16000	0.114	<b>NU-204-E</b>
	47	18	38.5	31	5	16000	0.146	<b>NU-204-E</b>
	52	15	36.5	26	3.25	14000	0.153	<b>NU2204-E</b>
	52	21	48.5	38	6.3	14000	0.215	<b>NU304-E</b>
<b>25</b>	47	12	16.7	12.9	1.52	28000	0.092	<b>NU2304-E</b>
	52	15	34.5	27.5	4.35	15000	0.135	<b>NU1005-M</b>
	52	15	34.5	27.5	3.5	15000	0.137	<b>N205-E</b>
	52	18	41.5	34.5	5.7	15000	0.165	<b>NU205-E</b>
	62	17	48	36.5	5.8	12000	0.242	<b>NU2205-E</b>
	62	17	48	36.5	4.7	12000	0.245	<b>N305-E</b>
	62	24	66	55	9.4	12000	0.349	<b>NU305-E</b>
<b>30</b>	55	13	22.9	19.3	2.4	24000	0.134	<b>NU2305-E</b>
	62	16	45	36	5.7	12000	0.205	<b>NU1006-M</b>
	62	16	45	36	4.65	12000	0.207	<b>N206-E</b>
	62	20	57	48.5	8.1	12000	0.255	<b>NU-206E</b>
	72	19	61	480	8	10000	0.366	<b>NU2206-E</b>
	72	19	61	48	6.4	10000	0.368	<b>N306-E</b>
	72	27	86	75	13.2	10000	0.529	<b>NU2306-E</b>
<b>35</b>	62	14	29	26	3.15	20000	0.177	<b>NU1007-M</b>
	72	17	58	48.5	7.9	10000	0.301	<b>N207-E</b>
	72	17	58	48	6.4	10000	0.303	<b>NU207-E</b>
	72	23	72	64	10.8	10000	0.406	<b>NU2207-E</b>
	80	21	76	63	10.7	9000	0.486	<b>N307-E</b>
	80	21	76	63	8.6	9000	0.486	<b>NU307-E</b>
	80	31	108	98	17.4	9000	0.723	<b>NU2307-E</b>
	<b>40</b>	68	15	33.5	30.5	3.35	19000	0.216
80		18	63	53	8.7	9000	0.358	<b>N208-E</b>
80		18	63	53	7	9000	0.379	<b>NU208-E</b>
80		23	83	75	12.9	9000	0.492	<b>NU2208-E</b>
90		23	95	78	12.9	7500	0.656	<b>N308-E</b>
90		23	95	78	10.4	7500	0.659	<b>NU308-E</b>
90		33	132	119	20.7	7500	0.958	<b>NU2308-E</b>