


Deep groove ball bearings
Single row
d160-220 mm

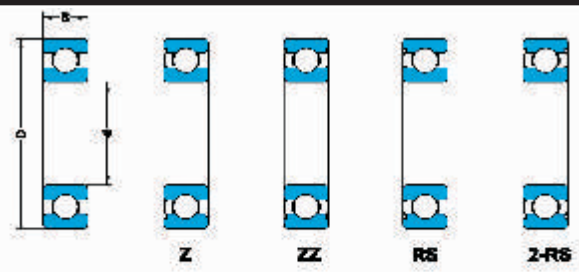

Principal Dimensions			Basic load ratings		Fatigue Load Limit	Speed ratings Lubrication		Mass	Designation
d mm	D	B	dynamic C kN	Static C ₀	P _u kN	Grease	Oil	kg	-
						RPM			
160	200	20	49.400	64.0	2.00	2800	3400	1.45	61832
	220	28	92.300	98.0	3.05	2600	3200	3.25	61932
	240	25	99.500	108.0	3.25	2400	3000	3.70	16032
	240	38	143.000	143.0	4.30	2400	3000	5.90	6032
	290	48	186.000	186.0	5.30	1900	2400	14.5	6232
	340	68	276.000	28.5	7.65	1800	2200	29.0	6332
170	215	22	61.800	78.0	2.40	2600	3200	1.90	61834
	230	28	93.600	106.0	3.15	2400	3000	3.40	61934
	260	28	119.000	129.0	3.75	2200	2800	5.00	16034
	260	42	168.000	173.0	5.00	2200	2800	7.90	6034
	310	52	212.000	224.0	6.10	1900	2400	17.5	6234
	360	72	312.000	340.0	8.80	1700	2000	34.5	6334
180	225	22	62.400	81.5	2.45	2400	3000	2.00	61836
	250	33	119.000	134.0	3.90	2200	2800	5.05	61936
	280	31	138.000	146.0	4.15	2000	2600	6.60	16036
	280	46	190.000	200.0	5.60	2000	2600	10.5	6036
	320	52	229.000	24.0	6.40	1800	2200	18.5	6236
	380	75	351.000	405.0	10.40	1700	2000	42.5	6336
190	240	24	76.1	98.0	2.80	2200	2800	2.60	61838
	260	33	117.0	134.0	3.80	2200	2800	5.25	61938
	290	31	148.0	16.0	4.55	2000	2600	7.90	160.8
	290	46	195.0	216.0	5.85	2000	2600	11.0	6038
	340	55	255.0	280.0	7.35	1700	2000	23.0	6238
	400	78	371.0	430.0	10.80	1600	1900	49.0	6338
200	250	24	76.1	102.0	2.90	2200	2800	2.70	61840
	280	38	148.0	166.0	4.55	2000	2600	7.40	61940
	310	34	168.0	190.0	5.10	1900	2400	8.85	16040
	310	51	216.0	245.0	6.40	1900	2400	14.0	6040
	360	58	270.0	310.0	7.80	1700	2000	28.0	6240
	420	80	377.0	465.0	11.20	1500	1800	55.5	6340
220	270	24	78.0	110.0	3.00	1900	2400	3.00	61844
	300	38	151.0	180.0	4.75	1900	2400	8.00	61944
	340	37	174.0	204.0	5.20	1800	2200	11.5	16044
	340	56	2470.0	290.0	7.35	1800	2200	18.5	6044
	400	65	296.0	365.0	8.80	1500	1800	37.0	6244
	460	88	410.0	520.0	12.00	1300	1600	72.5	6344