


Sealed Single Row Deep groove ball bearings
d6-12mm

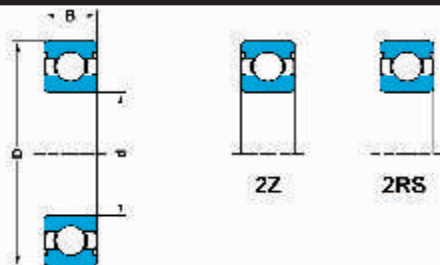

Principal Dimensions			Basic load ratings		Fatigue Load Limit	Speed ratings Lubrication		Mass	Designation
d mm	D	B	dynamic C kN	Static C ₀	P ₀ kN	Grease	Oil	kg	-
						RPM			
6	19	6	2.34	0.95	0.04	80 000	40 000	0.0084	626-2Z
	19	6	2.34	0.95	0.04	80 000	40 000	0.0084	626-2RS
7	19	6	2.34	0.95	0.04	85 000	43 000	0.0075	607-2Z
	19	6	2.34	0.95	0.04	85 000	43 000	0.0075	607-2RS
	22	7	3.45	1.37	0.057	70 000	36 000	0.013	627-2Z
	22	7	3.45	1.37	0.057	70 000	36 000	1.012	627-2RS
	22	7	3.45	1.37	0.057	70 000	38 000	0.012	608-2Z
	22	7	3.45	1.37	0.057	70 000	38 000	0.012	608-2RS
	24	8	3.9	1.66	0.071	63 000	32 000	0.017	628-2Z
	24	8	3.9	1.66	0.071	63 000	19 000	0.017	628-2RS
9	24	7	3.9	1.66	0.071	70 000	34 000	0.014	609-2Z
	24	7	3.9	1.66	0.071	70 000	34 000	0.014	609-2RS
	26	8	4.75	1.96	0.083	60 000	32 000	0.020	629-2Z
	26	8	4.75	1.96	0.083	60 000	32 000	0.020	629-2RS
10	19	5	1.38	0.59	0.025	80 000	38 000	0.0055	61800-2Z
	19	5	1.38	0.59	0.025	80 000	22 000	0.0055	61800-2RS
	22	6	2.08	0.82	0.036	75 000	36 000	0.010	61900-2Z
	22	6	2.08	0.82	0.036	75 000	20 000	0.010	619-2RS
	26	8	4.75	1.96	0.083	67 000	34 000	0.019	6000-2Z
	26	8	4.75	1.96	0.083	67 000	34 000	0.025	6000-2RS
	26	12	4.62	1.96	0.083	67 000	19 000	0.022	63000-2RS
	30	9	5.4	2.36	0.1	56 000	28 000	0.032	6200-2Z
	30	9	5.4	2.36	0.1	56 000	28 000	0.032	6200-2RS
	30	14	5.07	2.36	0.1	56 000	17 000	0.04	62200-2RS
	35	11	8.52	3.4	0.143	50 000	26 000	0.053	6300-2Z
	35	11	8.52	3.4	0.143	50 000	26 000	0.053	6300-2RS
	35	17	8.06	3.4	0.143	50 000	15 000	0.06	62300-2RS
	12	21	5	1.43	0.67	0.028	70 000	36 000	0.0063
21		5	1.43	0.67	0.028	70 000	20 000	0.0063	61801-2RS
24		6	2.25	0.98	0.043	67 000	32 000	0.011	61901-2Z
24		6	2.25	0.98	0.043	67 000	19 000	0.011	61901-2RS
28		8	5.4	2.36	0.1	60 000	30 000	0.022	6001-2Z
28		8	5.4	2.36	0.1	60 000	30 000	0.022	6001-2RS
28		12	5.07	2.36	0.1	60 000	17 000	0.029	63001-2RS
32		10	7.28	3.1	0.132	50 000	26 000	0.037	6201-2Z
32		10	7.28	3.1	0.132	50 000	26 000	0.037	6201-2RS
32		14	6.89	3.1	0.132	50 000	15 000	0.045	62001-2RS
37		12	10.1	4.15	0.176	45 000	22 000	0.060	6301-2Z
37		12	10.1	4.15	0.176	45 000	22 000	0.060	6301-2RS
37		17	9.75	4.15	0.173	45 000	14 000	0.070	62301-2RS