


Spherical Roller Thrust Bearing

d60-180mm

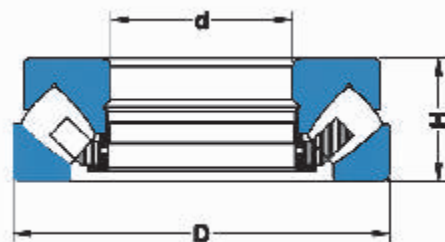

Principal Dimension			Basic Load Rating		Limiting Speed Lubrication Oil RPM	Mass Kg	Designation
d	D	H	Dynamic C	Static C ₀			
mm				kN			
60	130	42	280	815	2400	2.60	29412 M
65	140	45	330	965	2200	3.30	29413 M
70	150	48	360	1060	2000	4.00	29414 M
75	160	51	415	1250	2000	4.87	29415 M
80	170	54	450	1370	1900	5.80	29416 M
85	180	58	510	1560	1800	6.90	29417 M
90	190	60	570	1760	1700	8.10	29418 M
100	210	67	680	2160	1500	11.8	29420 M
110	190	48	425	1430	1600	5.50	29322 M
	230	73	800	2550	1400	14.5	29422 M
120	210	54	530	1860	1400	7.58	29324 M
	250	78	900	2950	1300	18.1	29424 M
130	225	58	600	2120	1300	9.30	29326 M
	270	85	1060	3450	1200	22.5	29426 M
140	240	60	655	2320	1300	11.0	29328 M
	280	85	1100	3650	1200	24.2	29428 M
150	250	60	670	2450	1200	11.5	29330 M
	300	90	1250	4250	1100	29.4	29430 M
160	270	67	780	2850	1100	15.2	29332 M
	320	95	1400	4800	1000	35.5	29432 M
170	280	67	800	2950	1100	16.0	29334 M
	340	103	1560	5400	940	43.7	29434 M
180	300	73	950	3550	1000	20.3	29336 M
	360	109	1730	6100	890	52.0	29436 M